Technical manual and Installation Guide



NEW

Trelona ATBS

Advance Termite Bait System

D-BASF

We create chemistry




Introduction to Trelona ATBS

BASF's new Advance Termite Bait System (ATBS) with Trelona Termite Bait sets a new benchmark in termite baiting for the Australian market. Powered by a novel active ingredient 'Novaluron', Trelona requires much less bait for complete colony elimination to be achieved when compared to other termite baits. Trelona ATBS gives pest management professionals the freedom to offer their customers a traditional monitoring system or an 'Active on Application' system. Trelona ATBS may also be used in combination with BASF's industry leading termiticides, Termidor® Residual Termiticide and Insecticide and Termidor HE Residual Termiticide, so a management system can be tailored for any situation. As an 'Active on Application' system, Trelona ATBS allows pest management professionals to extend out their inspection frequencies whilst providing year-round protection from the time of installation. The unique ATBS station holds up to 248 grams of bait and has been designed to encourage termite interception and quick feeding. This provides pest management professionals with the peace of mind that their clients' most valuable asset is being protected. Trelona ATBS and Termidor brands are supported by BASF, the leader in termite control since the launch of Termidor in 2002.

System Components

The Trelona ATBS has been designed to survive the toughest of conditions whilst also being simple and efficient to install. The robust inground bait stations have been developed to accelerate interception and encourage feeding. As a monitoring system, ATBS ensures minimal disturbance during inspection and bait replacement. As an 'Active on Application' system, Trelona ATBS holds more bait than any other comparable system.

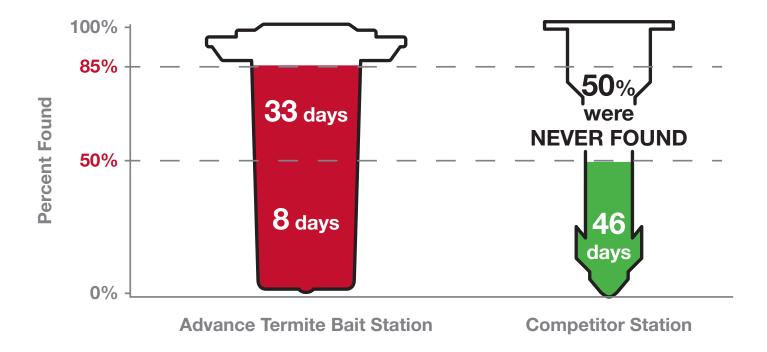


Trelona ATBS Bait Stations feature a superior design that leads to fast termite hits. In fact, in a university study, termites found the Trelona ATBS Station faster than the competitor's bait station. In this study, Trelona ATBS and the competitor's bait station were placed within 500mm of an active termite colony. The study had 20 replicates and stations were checked daily over 46 days, producing the results above.

Trelona Advanced Bait Technology

Trelona is powered by a unique active ingredient Novaluron formulated within BASF's patented Puri-cell bait technology. Novaluron is a next generation Chitin Synthesis Inhibitor (CSI), effective on key subterranean termite species including *Mastotermes darwinensis*. The unique patented matrix has also shown to be highly palatable to all species of termite, while also being robust enough to last over two years in field conditions.




Mound trials with Coptotermes acinaciformis demonstrated less bait required for colony elimination

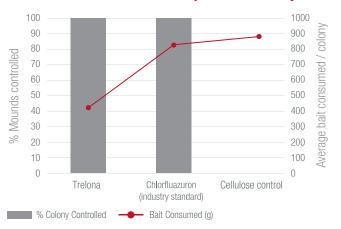

Source: BASF Australia 2017

Mini house trials with Mastotermes darwiniensis - 100% colony elimination

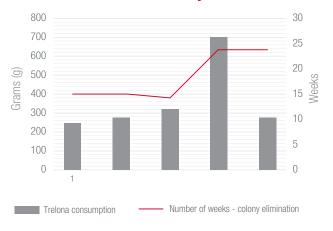

Source: ATP Research 2017



Termite Management

Effective termite management can only be achieved once a thorough termite inspection has been undertaken for any given site. A termite inspection provides the basis for determining the control measures to be implemented and what remediation measures are required to minimise future risk. As part of the inspection, pest management professionals need to consider what treatment options best suit the site and how best to deploy these tools to ensure maximum protection. Trelona ATBS and the Termidor range of products provide pest management professionals with the most complete suite of tools available to manage termites. Trelona ATBS is the only baiting system designed and tested to be used in conjunction with Termidor, providing pest management professionals and homeowners with ultimate solutions for even the most difficult situations.

Initial Termite Treatment

When termites have entered a structure, a thorough termite inspection is required to determine the extent of the activity, damage and termite species. Only once this is carried out can a termite management plan be developed, which outlines what initial treatment should be undertaken and the future protection plan of the structure. Options for treating the termites in the structure will depend on the level of activity, termite species and where termites are entering the structure. Chemical treatments such as Termidor Foam (dry foam specifically designed for stage one treatments) may be applied directly to termite workings where present in the structure and act to control termites rapidly.

A limited interior application of Termidor Residual Termiticide and Insecticide or Termidor HE Residual Termiticide may also be utilised to eradicate termites and protect entry points. Applications should be undertaken as per instructions on the product label and applied around known points of entry.


In some circumstances, above ground baiting may be the best suited treatment option to eradicate termite activity, with the process being very effective in situations where the chemical application could be limited, such as where low termite numbers are present. Baiting active termites within a structure provides a means of controlling the colony where foaming is not practical and a protective treatment cannot be undertaken.

The Trelona ATBS system can be used in conjunction with existing above ground baiting systems where required.



The Trelona ATBS system may be used on active sites or as a preventative system.

ATBS stations should be installed around a structure at approximate intervals of 3m and ideally between 300mm - 600mm from the outside walls. Stations can also be placed in additional areas where termites are active or where conducive conditions exist around the property.

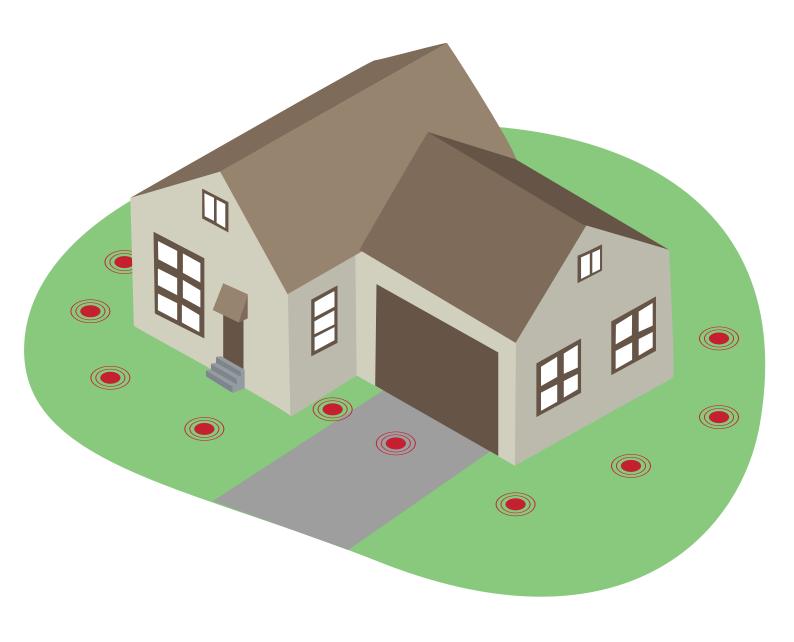



To create the required opening for the ATBS inground station, an auger of 75-80mm is required and a hole should be excavated to a depth of at least 170mm to allow the station to be installed to a neat finish, close to the ground level. If possible, it is recommended that the hole is excavated an additional 50-80mm below the depth of the base of the station to create a natural sump to allow the excess moisture to drain (Figure 1).

The station can now be inserted into the ground (Figure 2). It is important to get the station as flush as possible to the ground level to reduce any trip hazards or collisions with lawn mowers. Remove the grass from under the collar of the station, this will get the station into a low-profile position and stop grass growing underneath the station over time.

Once inserted in the soil, the fins under the station collar are designed to reduce rotation so it doesn't come loose when servicing. Upon installation, if your station collar is not resting on soil, it may be necessary to step on the station to firmly lock it into the soil (Figure 3). The ATBS stations are constructed from a strong durable plastic and can withstand some direct force. With your foot placed over the top of the station, press down until the station's fins have bedded down in the soil.

Once your inground station is in place you will be ready to add your monitoring components or Trelona bait cartridges. It may be necessary to put stations into areas where concrete or tarmac is present. This would require a core to be cut through the surface to gain access for the in-concrete station to be installed. Concrete or tarmac cutting should be carried out by someone trained in this field; you may use a professional concrete cutting company to do this service on your behalf. It is recommended when cutting through concrete that utility services are identified before commencing this activity.

Once the core is cut you may need to remove some additional soil from under the concrete to make room for the Advance Concrete Bait Station (CBS). Trial fit the station to check if the sleeve drops down into the void. The sleeve will have to be at least 5mm below the depth of the base of the steel cap as they are a similar diameter and will stop the cap fitting flush. If the sleeve goes down too deep, or there is some soil subsidence, it may be necessary to add some soil back into the hole. Once you have the sleeve in the correct position you will be ready to add your monitoring or bait components and fit the steel cap (Figure 4).









Monitoring System

The ATBS stations, both inground and in-concrete, can be used as a baiting and monitoring system, where Trelona bait is added once termite activity is intercepted in the station.

The monitoring system is comprised of two components, a timber monitor and a Puri-cell micro crystalline cartridge.

The Timber Monitor Base (TMB) is machined with horizontal grooves and is sourced from a premium wood species. The timber monitor base is placed into the base of the station first - this creates significant wood to soil contact and provides a conducive environment for termites.

The second component for monitoring is the Termite Inspection Cartridge (TIC). This monitoring cartridge contains Puri-cell tablets which are formulated with highly purified cellulous, a preferred food source for termites. The timber inspection cartridge should be placed in the bait station on top of the timber monitor base. The design of this monitoring system allows termites to easily find the timber monitor base, build in numbers when feeding on the timber and travel upwards into the termite inspection cartridge. When termites move into feed on the compressed Puri-cell cartridge, they will exploit this food source and invest time in the station, improving the chances of intercepting termites on a regular inspection. When handling these monitoring components, disposable gloves should be worn to avoid contamination that could deter termites from entering the station.

When both monitoring components have been added to the in-ground station, place the lid on top and twist clockwise with the Spider key tool, locking the lid in place.

When baiting with an in-concrete station, add the monitoring components into the station and place the steel cap in the concrete hole. Use a hex socket or spanner to tighten the lid mechanism, ensuring the lid is secure. If this station is placed in an area with foot traffic, consider a steel cap with an abrasive finish to reduce the risk of a slip hazard.

After installing your ATBS stations, document the placement with the use of a site plan, mapping of your stations will be a record of how the site is set out. Number each station so that they can be identified in future reporting of the site. Keep your site plan up to date as in the future you may add or remove stations depending on the conditions.

Trelona Termite Bait

The Trelona Bait Cartridge (TBC) contains the same highly palatable compressed Puri-cell formulation as the monitoring cartridge with the inclusion of the novel active ingredient, Novaluron. Novaluron is a chitin synthesis inhibitor and when consumed by termites it impairs the ability of a termite to properly synthesise chitin - an essential polymer required for the formation of termite exoskeletons. In Australian trials, the Trelona termite bait demonstrated outstanding performance. Colony elimination was achieved with significantly less bait when compared to industry standard baits.

Active on Application

The Trelona ATBS system may also be installed as an 'Active on Application' (AoA) system. For an AoA system, install ATBS stations as outlined above (refer to section - Installation of Advance Termite Bait System). Load each ATBS station with two 124g Trelona Termite Bait cartridges, so that a total of 248g is available in every station. Pre-loaded AoA stations are also available. Active on Application systems are designed to provide immediate protection to the structure even when you are not there, providing protection for your customers in-between visits.

Station inspection and maintenance

When Installing ATBS as a Monitoring System

Regular inspection of the ATBS monitoring system is critical to the operation of the system. Station inspections should be carried out on a regular schedule of between 8-12 weeks apart. Note that during warmer months or in areas where *Mastotermes darwiniensis* occur, inspections may be carried more frequently.

Maintaining Monitoring Stations



Step 1.

Remove the lid of the station by using the Spider key tool, pull out the TIC with long nose pliers or a probing tool. When the TIC is removed check for any termite activity on the cartridge, now investigate the station to inspect the TMB.

- If no activity is found, proceed to step 2.
- If live termite activity is found go to step 5.



Step 2.

If the TMB needs to be replaced, use the pliers to remove both halves of the timber monitor and discard safely. Clean out the station of any debris or soil that would prevent the new TMB from being installed. Install the new TMB placing both halves of the timber into the bottom of the station.



Step 3.

Assess the condition of the TIC you removed in step 1. Replace if it has been affected by mould or other issues that render it un-serviceable. If the TIC is serviceable, drop it back in the station or if not, add a new TIC into the station on top of the TMB. Replace the TIC at least every 24 months.



Step 4.

Place the lid back on the station and secure it by rotating clockwise using the Spider key tool, add your activity and actions to your inspection report. Inspection can be scheduled for this station in another 8 -12 weeks. No further steps are needed.



Step 5.

If active termites are found on inspection, once the TIC has been removed in step 1, it is now time to quickly change over to the active bait cartridge. Trelona Termite Bait comes in an individual cartridge sealed in a plastic wrapper, this packaging needs to be removed prior to installing the bait into the station. Remember, disposable gloves must be worn whilst handling bait cartridges. The TBC can be added without the addition of water.

Replace the lid back on the station and secure by rotating clockwise using the Spider Key tool. This station information should be added to your report and inspected again at 4-8 weekly intervals, replenishing the bait as required.



Step 6.

Once a colony has been eliminated, a replacement TMB and TIC can be reinserted, and the monitoring program can be re-established on 8-12 week intervals.



Maintaining 'Active on Application' (AoA) Stations



Step 1.

Remove the lid of the station by using the Spider key tool, pull out the top Trelona Bait Cartridge (TBC) with long nose pliers or a probing tool. When the TBC is removed check for any termite activity on the cartridge and inspect the second TBC for any signs of activity.

- If no activity is found, proceed to step 2.
- If live termite activity is found go to step 3.



Step 2.

Assess the condition of both TBC that you removed in step 1. Replace the cartridge if it has more than 50% consumption, mould or other issues that render it un-serviceable. The TBCs should be replaced at least every 24 months.

If any of the cartridges need replacing, the Trelona Bait is supplied in an individual cartridge, sealed in a plastic wrapper. This packaging needs to be removed prior to installing bait into the station. Remember disposable gloves must be worn whilst handling bait cartridges when they are removed from the plastic wrapper. The TBC can be added without the need or addition of water. Load both TBCs into the station and place the lid back on the station and secure by rotating clockwise using the Spider key tool.

'Active on Application' stations can be inspected at 3-6 monthly intervals until termites are intercepted. Note, during warmer months or in areas where Mastotermes darwiniensis occur inspections may be carried out more frequently. (1-2 months)

No further steps are needed.



Step 3.

If active termites are found on inspection and there is more that 50% consumption of either of the TBCs, they should be replaced. Trelona Bait is supplied in an individual cartridge sealed in a plastic wrapper; this packaging needs to be removed prior to the bait being installed into the station. Remember, disposable gloves must be worn whilst handling bait cartridges when they are removed from the plastic wrapper. The TBC can be added without the addition of water. The TBCs should be replaced at least every 24 months.

Replace the lid back on the station and secure it by rotating clockwise using the Spider key tool. Active stations should be inspected on a 6-8 weekly basis and replenished as required. Once the colony has been eliminated 3-6 monthly inspection intervals may be reinstated.



When installing Trelona Termite Bait as an Active on Application (AOA) System

Trelona Termite bait can be added to the Advance Termite Bait System as an active bait from the installation, making the active bait available from day one. During this installation, two 124g Trelona bait cartridges should be added to each ATBS station. Station inspections should be carried out at 3-6 monthly intervals until termites are intercepted. Note, during warmer months or in areas where Mastotermes darwiniensis occur, inspections may be carried out more frequently, the first inspection post installation may also be sooner (1-2 months post installation) should the structure be under attack.

Controlling ants around Trelona ATBS stations

Ants can be a challenge in and around termite bait stations. It is important to keep ants out of the station so that termites don't have to defend themselves, or potentially retreat from station, hindering the baiting process.

BASF's Seclira® WSG insecticide can be used to treat ants around infested ATBS stations. Apply the Seclira to ant trails, areas where ants are foraging, and nest entrances close to the station.

Amdro® Ant Granules can also be used. With the station lid closed, gently shake the granules around the bait station leaving up to a 300mm radius around the station. Concentrate the application on ant nests near the station to reduce the pressure. This treatment will be effective on the Singapore ant, Coastal Brown ant, Tropical fire ant or ginger ant, Greenhead ant and Red imported fire ant.

If there are ants present inside the station we recommend using Seclira PI or Seclira WSG to the inside of the station lid. Remove the lid from the station place face down away from the station. Apply the product and allow to dry before refitting the lid to the station.


Managing termites around structures

Trelona ATBS is compatible with and designed to be used in conjunction with the complete Termidor range, and is registered for combination termite treatments.

A combination treatment allows for a full Trelona ATBS system to be installed to a structure with Termidor Residual or Termidor HE applied to soil in high risk areas.

Structures that can have a complete Termidor Residual or Termidor HE soil treatment for the protection of the structure, can now have the added benefit of Trelona ATBS stations placed in conducive areas, around the structure and garden areas.

The flexibility of this label means that if a structure has a construction type where a liquid Termidor soil treatment cannot be continuous, a combination treatment with both systems can now be installed to give maximum protection on complex structures.

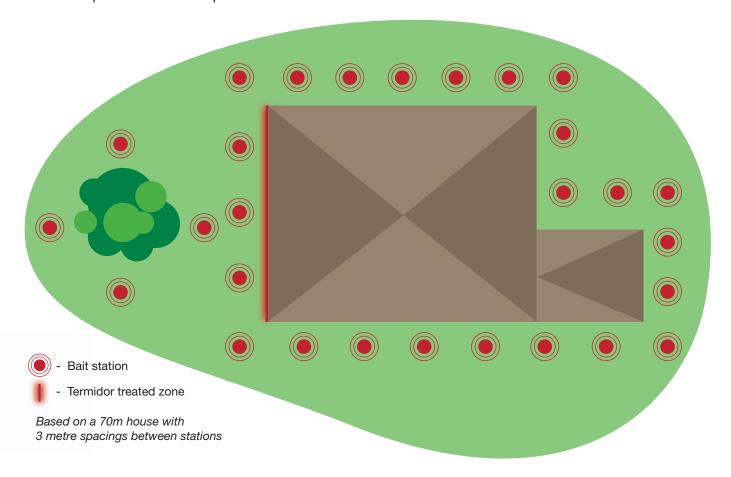

Trelona ATBS - System Components

- 1. TBS – Termite Bait Station (in-ground bait station)
- 2. TMB - Termite Monitoring Base (wood monitor)
- TIC Termite Inspection Cartridge (cellulose monitor) 3.
- TBC Trelona Bait Cartridge (active bait cartridge) 4.
- 5. CBS - Concrete Bait Station (in-concrete bait station)
- 6. The Spider key - station access tool
- AoA Active on Application 7.
- 8. TBS replacement lid.



1. TBS - Termite Bait Station (bait station)



2. TMB - Termite Monitoring Base (wood monitor)



3. TIC - Termite Inspection Cartridge (cellulose monitor)



4. TBC - Trelona Bait Cartridge (active bait cartridge)



5. CBS - Concrete Bait Station (in-concrete bait station)



6. The Spider key station access tool



7. AoA - Active on Application



8. TBS replacement lid





Directions For Use

SITUATION	PESTS	CRITICAL COMMENTS
For use in areas conducive to termite foraging	Subterranean termites including (but not limited to):	Install TRELONA around structures to be monitored or protected.
	Coptotermes acinaciformis, Mastotermes darwiniensis, Schedorhinotermes spp.	TRELONA may be installed as a monitoring system with bait added once termite activity is observed within station or as an active system on application with TRELONA added during installation. For further detail refer to General Instructions.

NOT TO BE USED FOR ANY PURPOSE, OR IN ANY MANNER, CONTRARY TO THIS LABEL UNLESS AUTHORISED UNDER APPROPRIATE LEGISLATION

General Instructions

The active ingredient, Novaluron, is an insect development inhibitor. When consumed by a termite, novaluron impairs the ability of a termite to properly synthesize chitin and inhibits the termite's ability to moult. Moulting is the process by which termites, at certain points in their development, shed their existing exoskeleton and form a replacement exoskeleton. Termites that attempt to moult after ingesting an amount of bait sufficient to impair their moulting process either die or are incapacitated by their inability to complete the moulting process. Insect development inhibitors such as novaluron are characterised as slow acting toxicants; however, their action is slow only when they affect a termite at the point in its life cycle when it moults. Because all the termites in a colony DO NOT moult at the same time, the effect of novaluron on the colony as a whole is progressive. This progressive effect is one of the key attributes of novaluron enabling termite colony effects.

Sufficient consumption of bait by a termite colony can cause a decline in the number of colony members. Such a decline, if sustained by continued consumption of bait by the colony, can significantly impair the colony vitality. Further, continued consumption of bait by remaining colony members may ultimately result in the total elimination of the colony. The extent of the decline of the colony, the speed of its decline and the possibility of its elimination depends upon the extent to which bait is made continuously available to a colony for consumption and the extent to which members of the colony consume it. Adherence to the DIRECTIONS FOR USE can increase the likelihood of colony elimination; however, conditions or circumstances beyond the control of the user may prevent or substantially delay colony elimination. Such conditions may include, but are not limited to, alternate non-bait food sources that reduce the extent to which the colony depends on the bait as a food source, excess moisture, low or high temperatures or abandonment of feeding on the bait by the colony.



For more information on Trelona ATBS, visit trelona.com.au or call 1800 558 399